

M/50/LSU, M/50/RAC, TM/50/RAU

Magnetically operated switch, Reed contact

- Suitable for all cylinder ranges with magnetic piston
- Switches can be mounted flush with the delivered special adaptor
- LED indicator on LSU models
- Alternative variants allows a wide range of application



Technical features

Operation: M/50/LSU Normally open with LED (yellow)	Switching power: 10 W/10 VA max.	Protection rating (EN 60529): IP 66	Cable length: 2, 5 or 10 m
Switching voltage (U_b): 10 ... 240 V a.c./170 V d.c.	Contact resistance: 150 mΩ	Shock resistance: 50 g (during 11 ms)	Electromagnetic compatibility according to: EN 60947-5-2
Switching voltage output: U _b - 2,7 V	Response time: 1,8 ms	Vibration resistance: 35 g (at 2000 Hz)	Materials: Body: plastic Cable: see table below
Switching current (see graph overleaf): 0,18 A max.	Operating temperature: -25°C ... +80°C (-13°F ... +176°F)	Cable type: 2 x 0,25: PVC, PUR or silikon 3 x 0,25 PVC	
	High temperature version: +150°C max.(+302 °F)		

Technical data

Symbol	Voltage (V a.c.)	Voltage (V d.c.)	Current maximum (mA)	Function	Operating temperature (°C)	LED	Protection class	Plug	Cable length (m)	Cable type	Weight (g)	Model
	10 ... 240	10 ... 170	180	Closer	-25 ... +80	•	IP66	–	2, 5 or 10	PVC 2 x 0,25	37	M/50/LSU/*V
	10 ... 240	10 ... 170	180	Closer	-25 ... +80	•	IP66	–	5	PUR 2 x 0,25	37	M/50/LSU/5U
	10 ... 240	10 ... 170	180	Closer	-25 ... +150	–	IP66	–	2	Silicon 2 x 0,25	37	TM/50/RAU/2S
	10 ... 240	10 ... 170	180	Changeover	-25 ... +80	–	IP66	–	5	PVC 3 x 0,25	37	M/50/RAC/5V
	10 ... 240	10 ... 170	180	Changeover	-25 ... +80	–	IP66	–	5	PVC 3 x 0,25	37	M/50/RAC/5V
	10 ... 60	10 ... 60	180	Closer	-25 ... +80	•	IP66	M8 x 1	0,3	PVC 3 x 0,25	16	M/50/LSU/CP *1)
	10 ... 60	10 ... 60	180	Closer	-25 ... +80	•	IP66	M8 x 1	0,3	PVC 3 x 0,25	16	M/50/LSU/CP *1)
	10 ... 60	10 ... 60	180	Closer	-25 ... +80	•	IP66	M8 x 1	0,3	PVC 3 x 0,25	16	M/50/LSU/CP *1)


* Insert cable length; *1) Plug-in connector see page 2; Color code: BK = black, BN = brown, BU = blue

M/50/LSU selector

Variants	Substitute
High temperature (+150°C)	T
Type	Substitute
Reed with LED	L
Reed without LED	R
Switching voltage	Substitute
Standard	S
Special	A
Function	Substitute
Closer	U
Changeover	C

Cable	Substitute
Silicone	S
PVC	V
PUR	U
Cable length/plug	Substitute
2 m	2
5 m	5
10 m	10
Cable (0,3 m) with plug M8 x 1	CP

Switching current and switching voltage
M/50/LSU, M/50/RAC, M/50/RAU

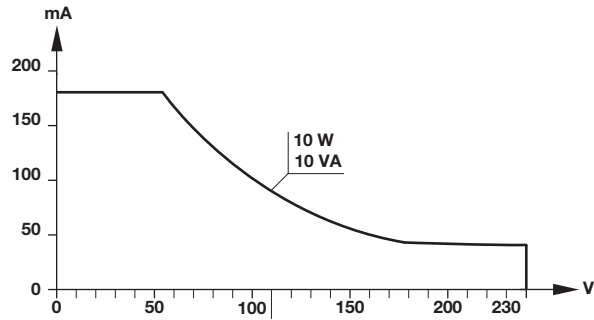

Accessories

Plug-in connector cable with nut



Outer cover	Cable length (m)	Weight (kg)	Connector	Connector
PVC 3 x 0,25	5 m	0,18	M8 x 1	M/P73001/5
PUR 3 x 0,25	5 m	0,18	M8 x 1	M/P73002/5
PUR 3 x 0,34	5 m	0,21	M12 x 1	M/P34594/5

Mounting elements for magnetic switches

<p>Cylinder with external tie rods RA/8000/M, KA/8000/M RA/28000/M, RM/900/M</p>	<p>Roundline cylinder RM/55401/M</p>	<p>Roundline cylinder KM/55001/M, VSM/55640/N2</p>	<p>Roundline cylinder R./57100/M, R./57200/M R./57300/M</p>	<p>Roundline cylinder < 25 mm stroke RM/8000/M, KM/8000/M RM/28000/M</p>	<p>Roundline cylinder > 25 mm stroke RM/8000/M, KM/8000/M RM/28000/M</p>
----------------------------------------------------------------------------------	--------------------------------------	----------------------------------------------------	-------------------------------------------------------------	-----------------------------------------------------------------------------	-----------------------------------------------------------------------------

Mounting elements

Cylinder Ø(mm)	Model	Cylinder Ø(mm)	Model	Cylinder Ø(mm)	Model	Cylinder Ø(mm)	Model	Cylinder Ø(mm)	Model	Cylinder Ø(mm)	Model
32 ... 200	QM/27/2/1	32	QM/33/432/22	32	QM/33/432/22	10	QM/33/010/22	10	QM/33/010/22	10	QM/33/010/23
		40	QM/33/440/22	40	QM/33/440/22	12	QM/33/012/22	12	QM/33/012/22	12	QM/33/016/23
		50	QM/33/450/22	50	QM/33/450/22	16	QM/33/016/22	16	QM/33/016/22	16	QM/33/016/23
		63	QM/33/463/22	63	QM/33/463/22	20	QM/33/020/22	20	QM/33/020/22	20	QM/33/020/23
		80	QM/33/480/22	80	QM/33/080/22	25	QM/33/025/22	25	QM/33/025/22	25	QM/33/025/23
		100	QM/33/410/22	100	QM/33/100/22	32	QM/33/032/22				
				125	QM/33/125/22	40	QM/33/040/22				
						50	QM/33/050/22				
						63	QM/33/063/22				

Dimensions see relevant cylinder sheets.

Drawings

M/50/LSU/*V, M/50/LSU/5U,
TM/50/RAU/2S
Cable length L = 2, 5 or 10 m






M/50/RAC/5V
Cable length L = 5 m



M/50/LSU/CP



Dimensions in mm
Projection/First angle

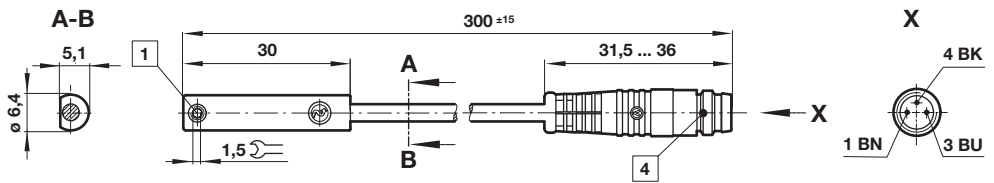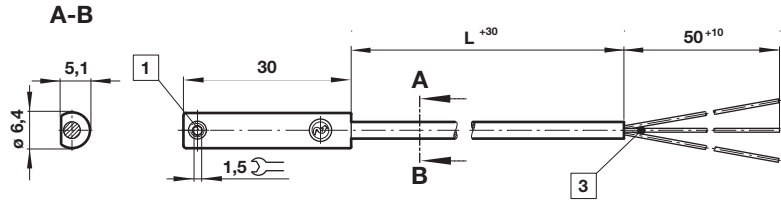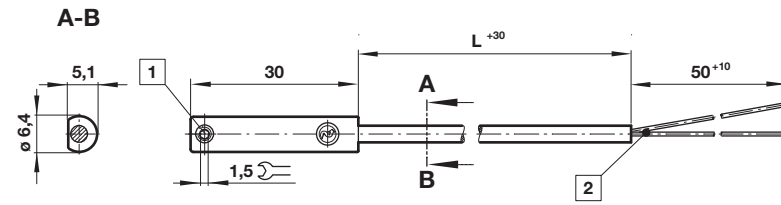

- 1 Fixing screw
- 2 + BN = brown; - BU = blue (output)
- 3 - BK = black; + BN = brown; - BU = blue
- 4 Plug M8 x 1, color code: BK = black; BN = brown; BU = blue

Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under »**Technical features/ data**«.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult Norgren.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.