



AS-i compact module K60 digital 4 DQ, IP67 4 x output, 2 A 24 V DC maximal 4 A for all outputs 4 x M12 socket Y-II assignment Mounting plate 3RK1901-0CA00 must be ordered separately

General technical data	
design of the product	digital I/O modules for operation in the field, IP67 - K60
Type	4 outputs
design of the slave type	standard slave
I/O configuration	8
ID/ID2 code	1/F
Number I/O sockets	4
type of electrical connection of the inputs and outputs	M12 screw-type terminals
AS interface total current input max	270 mA
operating voltage according to AS-Interface specification	26.5 ... 31.6 V
Ground terminal	PIN5 of each M12 socket is connected to the grounding wrist strap in the mounting plate using a pin
Addressing	front addressing socket
Delivery note	the modules are delivered without mounting plate
Note 2	An external additional supply (AUX POWER) of 20 to 30 V DC is required for the supply of the output circuits. The additional supply must comply with VDE 0106 (PELV), protection class III.
Inputs	
number of digital inputs	0
Input circuit	PNP transistor
Outputs	
number of digital outputs	4
type of voltage of output voltages	DC
Outputs external power supply 24 V DC	using black AS-Interface flat cable
ampacity of the semiconductor output at DC-13 at 24 V	2 A
Outputs aggregate current max	4 A
type of switching output	PNP transistor
design of the pin assignment of the outputs	Y-II assignment
Outputs socket assignment	3 = "-", 2/4 = output, 5 = ground terminal
property of the output short-circuit proof	Yes
Outputs	
• short-circuit protection	built-in
• induction protection	built-in
• watchdog	built-in
Assignment of the data bits	
Assignment of data bits	
• socket	not assigned (closed)
• socket 2	not assigned (closed)
• socket 3	not assigned (closed)
• socket 4	not assigned (closed)
• socket 5	PIN4 = OUT1 (D0), PIN2 = OUT2 (D1)

- socket 6
- socket 7
- socket 8

PIN4 = OUT2 (D1)
 PIN4 = OUT3 (D2), PIN2 = OUT4 (D3)
 PIN4 = OUT4 (D3)

Ambient conditions

ambient temperature	
• during operation	-25 ... +85 °C
• during storage	-40 ... +85 °C
protection class IP	IP67

Display

Status display	
• display of I/Os	yellow LED
• display of Uaux	green LED
• display of AS-Interface/diagnostics	green/red LED

Mechanical data

width	60 mm
height	152 mm
depth	29 mm
fastening method	standard rail mounting/wall mounting using mounting plate for K60 compact module
shock resistance	15g / 11 ms

Certificates/ approvals

General Product Approval	EMV
--------------------------	-----



[Confirmation](#)



EMV	Marine / Shipping	other
-----	-------------------	-------

[KC](#)



[Confirmation](#)

[Miscellaneous](#)


Environment	Industrial Communication
-------------	--------------------------

[Environmental Confirmations](#)



Further information

- Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>
- Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1100-1CQ00-0AA3>
- Cax online generator
<http://support.automation.siemens.com/WWW/CAXorder/default.aspx?lang=en&mlfb=3RK1100-1CQ00-0AA3>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3RK1100-1CQ00-0AA3>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1100-1CQ00-0AA3&lang=en

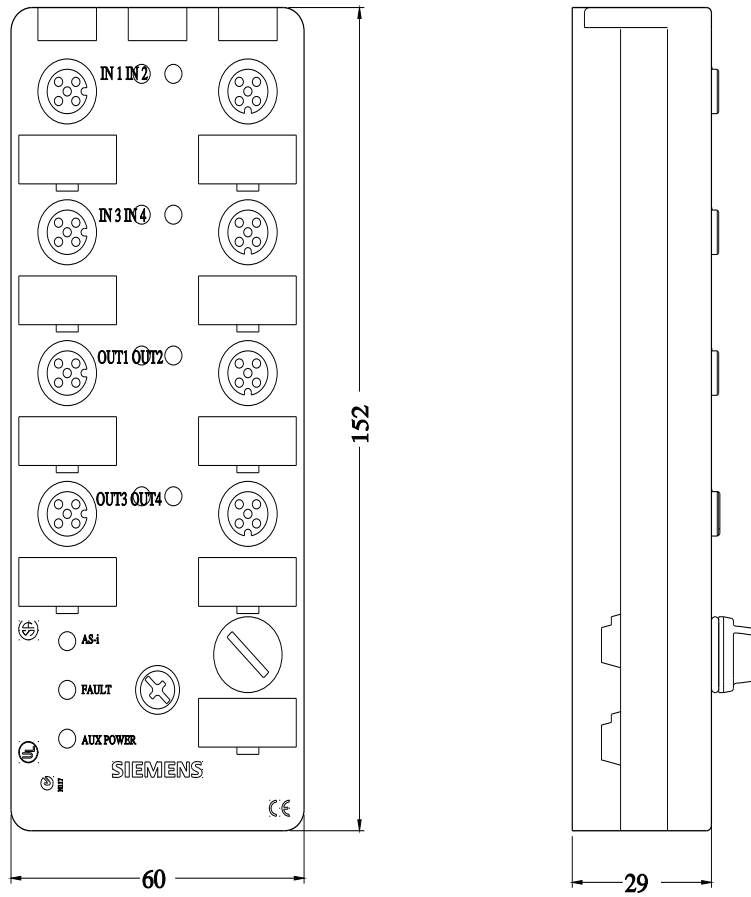

last modified:

3/11/2024 